




A CONNECTION DIAGRAM LED WHITE NOT DIMMABLE

Versions	Lamp module quantity
Softprofile 70	14,4W x m (meter)
Softprofile 100	14,4W x m (meter)


POWER SUPPLY WATTAGE (W)	MAX. LENGTH OF LED LINE	SECTION SUPPLY CABLE	MAX. DISTANCE BETWEEN POWER SUPPLY AND LED
50	7m	0,5mm ²	20m
150	20m	0,75mm ²	30m
240	34m	1mm ²	50m
480	68m	2,5mm ²	100m
750	107m	6mm ²	250m

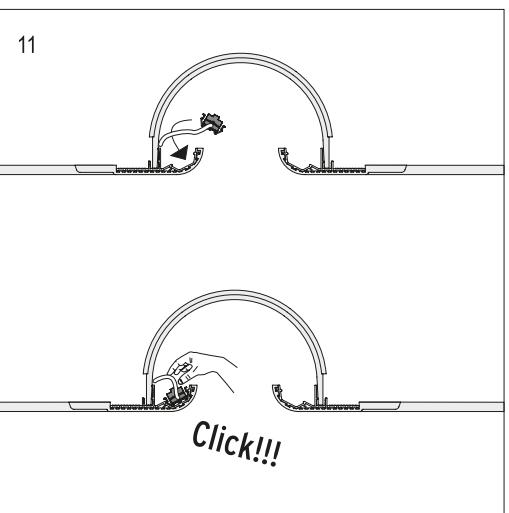

OPTION 1

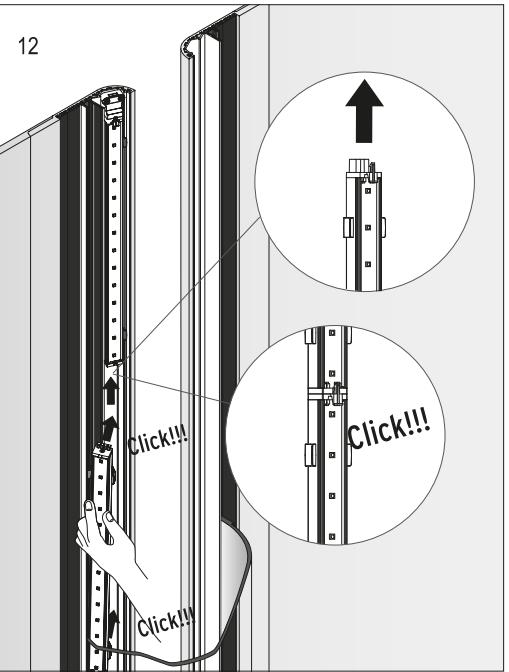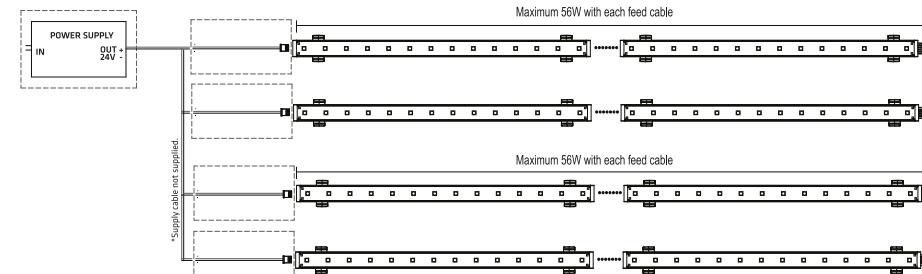


OPTION 2

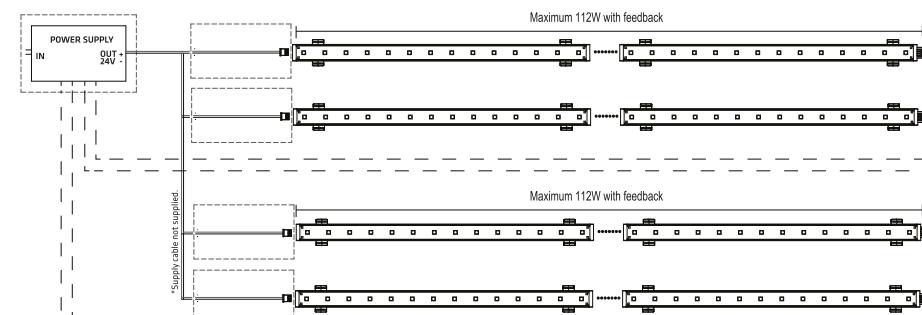


B CONNECTION DIAGRAM LED WHITE DIMMABLE 1-10V

POWER SUPPLY WATTAGE (W)	MAX. LENGTH OF LED LINE	SECTION SUPPLY CABLE	MAX. DISTANCE BETWEEN POWER SUPPLY AND LED
50	7m	0,5mm ²	20m
150	20m	0,75mm ²	30m
240	34m	1mm ²	50m
480	68m	2,5mm ²	100m
750	107m	6mm ²	250m

OPTION 1

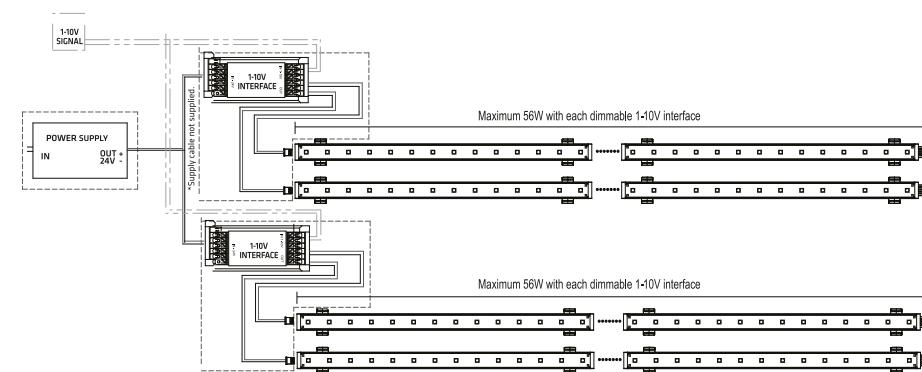


OPTION 2

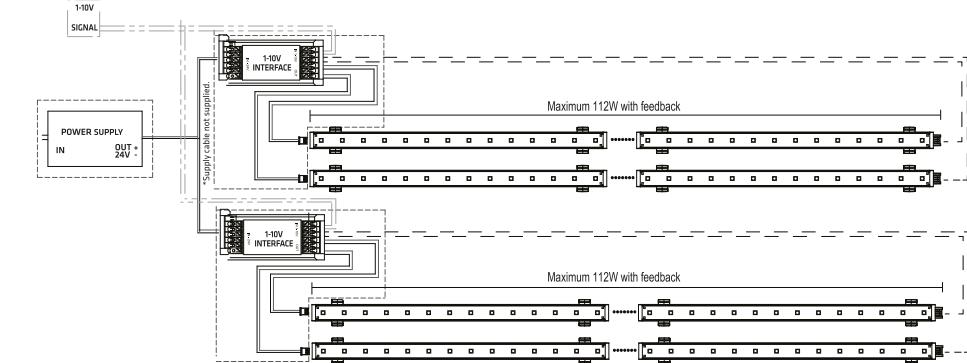

C CONNECTION DIAGRAM LED WHITE DIMMABLE DALI

POWER SUPPLY WATTAGE (W)	MAX. LENGTH OF LED LINE	SECTION SUPPLY CABLE	MAX. DISTANCE BETWEEN POWER SUPPLY AND LED
50	7m	0,5mm ²	20m
150	20m	0,75mm ²	30m
240	34m	1mm ²	50m
480	68m	2,5mm ²	100m
750	107m	6mm ²	250m

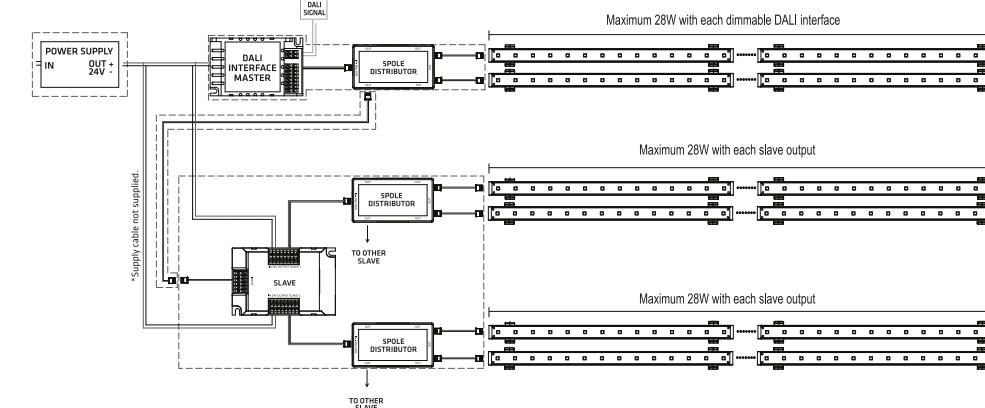

D CONNECTION DIAGRAM LED RGB

Max. lenght of LED line=3m

